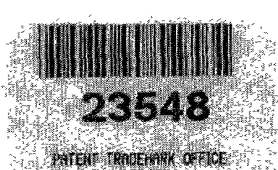| U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE **TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 USC 371 AND 37 CFR 1.491**	ATTORNEY DOCKET NO. 401553
	U.S. APPLICATION NO. 10/070354

INTERNATIONAL APPLICATION NO. PCT/JP00/06008	INTERNATIONAL FILING DATE September 5, 2000	PRIORITY DATE CLAIMED September 7, 1999

TITLE OF INVENTION
PROPYLENE RESIN COMPOSITION

APPLICANT(S) FOR DO/EO/US
NAKASHIMA, ET AL.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 USC 371 and 37 CFR 1.491.

2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371 and 37 CFR 1.491.

3. ☒ This is an express request to begin national examination procedures (35 USC 371(f)).

4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).

5. ☒ A copy of the International Application as filed (35 USC 371(c)(2))
    a. ☐ is attached hereto (required only if not communicated by the International Bureau).
    b. ☒ has been communicated by the International Bureau.
    c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).

6. ☒ An English language translation of the International Application as filed (35 USC 371(c)(2)).

7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3))
    a. ☐ are attached hereto (required only if not communicated by the International Bureau).
    b. ☐ have been communicated by the International Bureau.
    c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
    d. ☒ have not been made and will not be made.

8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).

9. ☒ An oath or declaration of the inventor(s) (35 USC 371(c)(4)).

10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).

11. Nucleotide and/or Amino Acid Sequence Submission
    a. ☐ Computer Readable Form (CRF)
    b. Specification Sequence Listing on:
       i. ☐ CD-ROM or CD-R (2 copies); or
       ii. ☐ Paper Copy
    c. ☐ Statement verifying identity of above copies

Items 12 to 19 below concern other document(s) or information included:

12. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
       ☒ Form PTO-1449
       ☒ Copies of Listed Documents

13. ☒ An assignment for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.

14. ☐ A FIRST preliminary amendment.
    ☐ A SECOND or SUBSEQUENT preliminary amendment.

15. ☐ A substitute specification.

16. ☐ A change of power of attorney and/or address letter.

17. ☒ Application Data Sheet Under 37 CFR 1.76

18. ☒ Return Receipt Postcard

19. ☐ other items or information:

U.S. APPLICATION NO. 10/070354	INTERNATIONAL APPLICATION NO. PCT/JP00/06008	ATTORNEY DOCKET NO. 401553

20. ☒ The following fees are submitted:	CALCULATIONS	PTO USE ONLY

Basic National Fee (37 CFR 1.492(a)(1)-(5)):
Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO......................$1,040.00
International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO..................$890.00
International preliminary examination fee (37 CFR 1.482) not paid to USPTO, but
international search fee (37 CFR 1.445(a)(2)) paid to USPTO.............................$740.00
International preliminary examination fee paid to USPTO (37 CFR 1.482)
but all claims did not satisfy provisions of PCT Article 33(1)-(4)..........................$710.00
International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(1) to (4).............................$100.00

		ENTER APPROPRIATE BASIC FEE AMOUNT=	$890.00	

Surcharge of $130.00 for furnishing the National fee or oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date | $ |

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	3 -20=		x $ 18.00	$	
Independent Claims	1 - 3 =		x $ 84.00	$	
☐ Multiple Dependent Claim(s) (if applicable)			+$280.00	$	

	TOTAL OF ABOVE CALCULATIONS=	$890.00	

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2. | $ |

	SUBTOTAL=	$890.00	

Processing fee of **$130.00** for furnishing English Translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date. | $ |

	TOTAL NATIONAL FEE=	$890.00	

Fee for recording the enclosed assignment. The assignment must be accompanied by an appropriate cover sheet. **$40.00** per property + | $40.00 |

	TOTAL FEE ENCLOSED=	$930.00	

	Amount to be: refunded	$
	charged:	$

a. ☒ A check in the amount of $930.00 to cover the above fee is enclosed.

b. ☐ Please charge Deposit Account No. 12-1216 in the amount of $ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 12-1216. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Leah Oubre, Reg. No. 44,990
LEYDIG, VOIT & MAYER, LTD.
700 Thirteenth Street, N.W., Suite 300
Washington, DC 20005-3960
(202) 737-6770 (telephone)
(202) 737-6776 (facsimile)

Date: 3/6/02

23548
PATENT TRADEMARK OFFICE

Patent National Phase Transmittal (Revised 10/18/01)

PROPYLENE RESIN COMPOSITION

TECHNICAL FIELD

This invention relates to propylene resin

5   compositions, and more particularly to propylene resin

compositions having a well-balanced combination of

transparency, stress-whitening resistance and impact

resistance at low temperatures, and further having good heat

resistance.

10   BACKGROUND ART

Polypropylene resins have been used in a wide

variety of fields, because of their relatively low cost and

excellent thermal and mechanical characteristics. In

general, however, propylene homopolymers has high stiffness,

15   but poor impact resistance, especially at low temperatures.

As those wherein the impact resistance at low temperatures

of propylene homopolymers is improved, a propylene block

copolymer composition comprising a propylene homopolymer

component as initially produced and an ethylene-propylene

20   random copolymer component as subsequently produced has been

extensively employed in various industrial fields including

automobiles and household appliances.

These conventional propylene block copolymer

compositions are excellent in impact resistance, but

25   inferior in transparency as compared with homopolymers and

have large whitening when subjected to impact. As a method

to improve the disadvantage of whitening by impact in the

propylene block copolymer composition, there have been

proposed a method of increasing the ethylene content in the

copolymer and a method of adding polyethylene to the

propylene block copolymer composition. Both methods are

5   excellent in an improvement of impact resistance, but have a

problem to reduce the transparency of the product.

JP-A-5-331327 discloses a polymer composition

comprising a propylene block copolymer composition with the

specified ratio of the intrinsic viscosity of a propylene

10   homopolymer component to that of an ethylene propylene

random copolymer component. JP-A-6-145268 discloses a

polymer composition with the specified intrinsic viscosity

of a propylene homopolymer component, the specified ratio of

the intrinsic viscosity of a propylene homopolymer component

15   to that of an ethylene propylene copolymer component and the

specified ethylene content in the ethylene propylene random

copolymer component. JP-A-56-72042 and JP-A-57-63350

disclose a polyolefin resin composition wherein an ethylene-

propylene copolymer containing a small amount of ethylene is

20   blended with other ethylene-propylene copolymer. JP-A-10-

87744 discloses a propylene resin composition wherein a

small amount of ethylene is incorporated in a propylene

homopolymer component in the ethylene-propylene block

copolymer.

25   DISCLOSURE OF THE INVENTION

Shaped articles made from these polymer

compositions have been more improved than conventional

propylene block copolymer compositions in respect of the stress-whitening resistance and transparency, but more improvements have been required.

An object of the invention is to provide a propylene resin composition having a well-balanced combination of transparency, stress-whitening resistance and impact resistance at low temperatures and further heat resistance characteristics.

As a result of earnest investigations to attain the above-described objects, we have found that a propylene resin composition wherein (A) a propylene-α-olefin random copolymer containing a specified amount of α-olefin unit and (B) a propylene-α-olefin random copolymer having the content of α-olefin unit different from the random copolymer (A) are composed in the specified composition has a well-balanced combination of transparency, stress-whitening resistance and impact resistance at low temperatures, and further good heat resistance characteristics, when loss tangent ($\tan \delta$) and storage elastic modulus (E') meet certain conditions respectively, in the temperature dependence of dynamic viscoelasticity of the composition, thus leading to the completion of the present invention.

Thus the present invention relates to a propylene resin composition comprising 80 to 40% by weight, based on the weight of the composition, of (A) a propylene-α-olefin random copolymer with the content of a propylene unit of 99.1 to 99.9% by weight, and 20 to 60% by weight, based on

the weight of the composition, of (B) a propylene-α-olefin random copolymer with the content of a propylene unit of 70 to 90% by weight, wherein the composition has only one peak of loss tangent (tan δ) in the temperature range of −80°C to 80°C, and the temperature providing not more than 1 x 10⁸ dyn/cm² of storage elastic modulus (E') is not less than 150°C, in the temperature dependence of dynamic viscoelasticity of the composition.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a flow sheet showing a continuous polymerization apparatus used in the Examples and Comparative Examples. In the reference numbers used in Fig. 1, 1 and 10 refer to a polymerization reactor, 2 and 7 refer to a hydrogen piping, 3 and 6 refer to a raw material mixing gas piping, 4 and 8 refer to an unreacted gas piping, 5 and 9 refer to a polymer removal piping, and 11 refers to an active inhibitor addition piping.

Fig. 2 is a chart of storage elastic modulus (E') and loss tangent (tan δ) measured, relating to Example 1.

Fig. 3 is a determined chart of storage elastic modulus (E') and loss tangent (tan δ) relating to Comparative Example 2.

BEST MODE FOR CARRYING OUT THE INVENTION

In the propylene resin composition, the propylene-α-olefin random copolymer (A) contains 99.1-99.9% by weight

of a propylene unit and 0.9-0.1% by weight of an α-olefin unit other than propylene.

If the content of a propylene unit in the copolymer (A) is too low, shaped article made from such propylene resin composition lowers in heat resistance characteristics. If the content is too high, the stress-whitening resistance and transparency of shaped articles become insufficient. It is particularly preferred that the propylene-α-olefin random copolymer (A) constituting the propylene resin composition of the present invention contains 99.5-99.9% by weight of a propylene unit and 0.5-0.1% by weight of an α-olefin unit other than propylene.

α-olefins constituting the α-olefin unit contained in the propylene-α-olefin random copolymer (A) can include ethylene, 1-butene, 1-pentene, 1-hexene, 1-octene, 1-decene, 1-dodecene, 4-methyl-1-pentene and 3-methyl-1-pentene. One or more olefins may be used. Ethylene and 1-butene are preferable from a viewpoint of manufacturing cost.

In the propylene resin composition of the present invention, the propylene-α-olefin random copolymer (B) contains 70-90% by weight of a propylene unit and 30-10% by weight of an α-olefin unit other than propylene. If the content of propylene unit in the copolymer (B) is too high, shaped article made from such composition become insufficient in the impact resistance at low temperatures. If the content is too low, shaped articles lower in transparency. The propylene-α-olefin random copolymer (B)

constituting the propylene resin composition of the present invention contains preferably 70-85% by weight of a propylene unit and 30-15% by weight of an α-olefin unit other than propylene, most preferably 75-85% by weight of a propylene unit and 25-15% by weight of an α-olefin unit other than propylene.

α-Olefins constituting the α-olefin unit contained in the propylene-α-olefin random copolymer (B) can include the same compounds as α-olefins contained in the copolymer (A). Ethylene and 1-butene are preferable.

The propylene resin composition of the present invention comprises 80 to 40% by weight, based on the weight of the composition, of (A) a propylene-α-olefin random copolymer and 20 to 60% by weight, based on the weight of the composition, of (B) a propylene-α-olefin random copolymer. If the content of the copolymer (A) is too high, the impact resistance at low temperatures becomes insufficient. If the content of the copolymer (A) is too low, the stiffness lowers remarkably.

It is particularly preferred that the propylene resin composition of the present invention comprises 80 to 50% by weight of (A) a propylene-α-olefin random copolymer and 20 to 50% by weight of (B) a propylene-α-olefin random copolymer.

The propylene resin composition of the present invention has only one peak of loss tangent (tan δ) in the temperature range of -80°C to 80°C in the temperature

dependence of dynamic viscoelasticity of the composition. When the propylene resin composition has two or more peaks of loss tangent in such temperature range, it shows that the compatibility of each component constituting such

5 composition is not sufficient. Shaped articles produced using this component do not exhibit such transparency and stress-whitening resistance as desired in the present invention.

When two different components exist together,

10 plural peaks itself of loss tangent which have appeared individually in the specified temperature range will become ambiguous gradually and it will be soon converged on one peak, as the compatibility of each component increases. However, it is considered that the composition of the

15 present invention comprising (A) a propylene-α-olefin copolymer and (B) a propylene-α-olefin copolymer with different contents of propylene unit from each other can achieve the effect desired in the present invention by constituting the peak of loss tangent so as to have only one

20 peak in the above temperature range, while the characteristics which each component claims individually are maintained and also each too strong claim is united about a certain characteristics.

In addition, the propylene resin composition of

25 the present invention is constituted, in the temperature dependence of dynamic viscoelasticity, so that the temperature which the storage elastic modulus (E') lowers to

1×10^8 dyn/cm^2 or less is 150℃ or more, although the storage

elastic modulus which is an index of dynamic viscoelasticity

lowers with the temperature rise. When the temperature is

less than 150°C, shaped article made from such composition

5   does not exhibit desired heat resistance characteristics.

When the temperature is 155°C or more, shaped articles made

from such propylene resin composition have more preferable

heat resistance characteristics.

The storage elastic modulus of the propylene resin

10   composition lowers rapidly, when the temperature of the

composition rises up more than a certain temperature. On the

other hand, lowering of storage elastic modulus of the

composition, i.e., change of dynamic viscoelastic

performance is gentle in such a range that the storage

15   elastic modulus exceeds 1×10^8 dyn/cm^2. Lowering of storage

elastic modulus (E') to 1×10^8 dyn/cm^2 or less signifies a

fatal loss in the dynamic viscoelastic performance. The

significance defining in the invention that the temperature

at which the storage elastic modulus (E') lowers to 1×10^8

20   dyn/cm^2 or less is not less than 150°C, signifies that

lowering in the performance of dynamic viscoelasticity with

the temperature rise can be maintained as a gentle lowering.

That is, it shows a heat resistant performance in the

dynamic viscoelasticity.

25   The propylene resin composition of the present

invention can be produced suitably, when the intrinsic

viscosity (hereafter referred to as $[\eta]_B$) as determined in

tetralin at 135°C for the propylene-α-olefin random copolymer (B) constituting the composition is in the range of 0.5 to 2.0 dl/g, particularly 1.0 to 2.0 dl/g, more preferably 1.3 to 2.0 dl/g.

Since the intrinsic viscosity $[\eta]_B$ of the propylene-α-olefin random copolymer (B) cannot be directly measured, it is calculated from the intrinsic viscosity (hereafter referred to as $[\eta]_A$) of the propylene-α-olefin random copolymer (A) and the intrinsic viscosity (hereafter referred to as $[\eta]_{WHOLE}$) of the propylene resin composition as a final product which can be directly measured, and the weight % (hereafter referred to as W_B) of the propylene-α-olefin random copolymer (B), in accordance with the following equation.

$$[\eta]_B = \{[\eta]_{WHOLE} - (1 - W_B/100)[\eta]_A\} / (W_B/100)$$

The propylene resin composition of the present invention having such constitution can be used suitably as a raw material for the production of shaped articles which are excellent in transparency, white-stressing resistance, impact resistance at low temperatures and further heat resistance characteristics.

The propylene resin composition of the present invention may be produced by any method if it has such construction, but it can be suitably produced by a two-stage continuous polymerization process in a vapor phase.

The two-stage continuous polymerization process comprises continuously conducting the first polymerization step wherein propylene and other α-olefins than propylene are copolymerized preferably in a vapor phase in the presence of a catalyst containing a catalyst component for polyolefin manufacure to produce a prescribed amount of the propylene-α-olefin random copolymer (A) having the specified composition ratio, and successively conducting the second polymerization step wherein propylene and other α-olefins than propylene are copolymerized by varying the composition ratio to produce a prescribed amount of the remaining propylene-α-olefin random copolymer (B).

The catalyst used in the above-mentioned process is not limited in particular. A variety of catalyst components such as titanium and metallocene type catalyst components can be used to produce the composition.

As the catalyst components for polyolefin manufacture, those with an average particle size of 30-300 μ m, preferably 30-150 μm are used. If the average particle size of the catalyst component for polyolefin manufacture is too small, the powder flowability of the resultant propylene resin composition is impaired remarkably, with the contamination within the polymerization system by adhesion of powder to the polymerization reactor wall and the agitator blade, and also the difficulty in conveyance of the powder discharged from the polymerization reactor, which leads to the hindrance of stable production.

Preferably, the catalyst component for polyolefin manufacture has a particle size distribution with not more than 3.0 of the degree of uniformity. If the degree of uniformity is larger, the powder flowability of the propylene resin composition will worsen, with the difficulty in continuously stable production.

A stereoregular catalyst comprising the above-described catalyst component for polyolefin manufacture, an organoaluminum compound, optionally in combination with an organosilicon compound is used in the copolymerization of propylene and other α-olefins than propylene in the first polymerization step. Preferably, the catalyst is used after being preactivated by reacting the catalyst component for polyolefin manufacture with small amounts of α-olefins.

Preactivation of the catalyst component for polyolefin manufacture can be performed in the presence or absence of similar organoaluminum compound to that used in the polymerization. In case where the transition metal in the catalyst component for polyolefin manufacture is titanium, the organoaluminum compound used in the preactivation is used usually in the range of 0.1-40 mols, preferably 0.3-20 mols per mol of titanium atom, but depending on variety of the catalyst component used for polyolefin manufacture. 0.1-100 grams, preferably 0.5-50 grams of α-olefins per gram of the catalyst component for polyolefin manufacture is reacted in an inert solvent using

such catalyst at 10-80°C over a period of 10 minutes to 48 hours.

In the preactivation, similar organosilicon compound to that used in the polymerization may be used if necessary, in the range of 0.01-10 moles per mol of the organoaluminum compound.

α-Olefins used in the preactivation of the catalyst component for polyolefin manufacture include ethylene, propylene, 1-butene, 1-pentene, 1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene, 1-eicosene, 4-methyl-1-pentene, 3-methyl-1-pentene and the like. These may be alone or a mixture of two or more compounds.

To control the molecular weight of polymer produced during the polymerization, a molecular weight modifier such as hydrogen can be used together.

Inert solvents used in the preactivation of the catalyst component for polyolefin manufacture are those not affecting the polymerization reaction remarkably, which include liquid saturated hydrocarbons such as hexane, heptane, octane, decane, dodecane and liquid paraffin, and silicon oils having dimethylpolysiloxane structure. These inert solvents may be either a single solvent of one solvent or a mixed solvent of two or more solvents.

In the use of these inert solvents, they are preferably used after removal of impurities such as

moisture, sulfur compound having a bad influence on the
polymerization.

The propylene resin composition of the present
invention is produced suitably by continuously conducting
the first polymerization step wherein propylene and other α-
olefins than propylene are copolymerized in a vapor phase in
the presence of a catalyst containing a catalyst component
for polyolefin manufacture which has been preactivated in
the above process, and successively conducting the second
polymerization step wherein propylene and α-olefins are
copolymerized by varying the ratio of propylene used in the
first polymerization step.

The first polymerization step, without limitation
to a vapor phase polymerization, can employ a slurry
polymerization and a bulk polymerization. The successive
second polymerization step is preferably a vapor phase
polymerization, and so preferably the first polymerization
step may also employ a vapor phase polymerization. In case
where slurry and bulk polymerizations are employed as the
second polymerization step, copolymer is dissolved out in
the solvent, by which continuation of stable operation tends
to become difficult.

For the polymerization conditions of the
propylene-α-olefin random copolymer (A), propylene and other
α-olefins than propylene are supplied under the conditions
including a polymerization temperature of 20-120°C,
preferably 40-100°C, a polymerization pressure of ambient

pressure to 9.9 MPa, preferably 0.59-5.0 MPa, in the

presence of a stereoregular catalyst comprising the catalyst

component for polyolefin manufacture, an organoaluminum

component and optionally an organosilicon compound, while

5   mixing and stirring prescribed amount of powders, thereby

carrying out the polymerization of the propylene-α-olefin

random copolymer (A). The use ratio (molar ratio) of the

organoaluminum compound to the catalyst component for

polyolefin manufacture is Al/Ti = 1-500, preferably 10-300

10   for the titanium catalyst component used, but depending on

the variety of catalyst component used for polyolefin

manufacture. In this case, a mol number of the titanium

catalyst component refers to a gram atom of substantial Ti

present in the titanium catalyst component. The use ratio

15   (molar ratio) of the organosilicon compound optionally used

to the organoaluminum compound is Al/Si =1-20 for the

titanium catalyst component used, but depending on the

variety of catalyst component used for polyolefin

manufacture.

20   The propylene-α-olefin random copolymer (A) is

produced so that the content of a propylene unit is 99.1 to

99.9% by weight and 80-40% by weight of the propylene-α-

olefin random copolymer (A) is contained in the composition.

         The composition of the present invention is

25   suitably obtained when the intrinsic viscosity $[\eta]_B$ of the

propylene-α-olefin random copolymer (B) is 0.5 to 2.0 dl/g.

Preferably, the present composition is further constituted

so that the intrinsic viscosity of the propylene-α-olefin random copolymer (A) is in the range of 0.5 to 4.0 dl/g and the resultant composition meets the requirements for "storage elastic modulus" and "loss tangent" in the present invention.

The intrinsic viscosity can be controlled by using a molecular weight modifier such as hydrogen at the time of polymerization. After the polymerization of the propylene-α-olefin random copolymer (A), part of the produced powder is taken out and subjected to the measurement of the intrinsic viscosity $[\eta]_A$.

Subsequent to the polymerization of the propylene-α-olefin random copolymer (A), the second polymerization step can be conducted wherein propylene and other α-olefins than propylene are copolymerized by varying the composition ratio of the mixed monomer in the first polymerization step, under the conditions including a polymerization temperature of 20-120°C, preferably 40-100°C, a polymerization pressure of ambient pressure to 9.9 MPa, preferably 0.59-5.0 MPa, to produce the propylene-α-olefin random copolymer (B). The propylene-α-olefin random copolymer (B) is adjusted so that the content of α-olefin unit in the copolymer is from 30 to 10% by weight, by controlling a gas molar ratio of α-olefin monomer and propylene monomer in the comonomer gas used.

The weight of the propylene-α-olefin random copolymer (B) is adjusted so that it is 20 to 60% by weight based on the weight of the composition, by controlling the

polymerization time and using a polymerization activity
modifier such as carbon monoxide, hydrogen sulfide or the
like. The molecular weight of the propylene-α-olefin random
copolymer (B) is adjusted so that the intrinsic viscosity
[η]$_B$ of the propylene-α-olefin random copolymer (B) is
preferably 0.5 to 2.0 dl/g, by using a molecular weight
modifier such as hydrogen upon the polymerization of the
copolymer (B).

The polymerization process may be any of batch,
semi-continuous and continuous processes, but a continuous
polymerization is industrially preferable.

After the completion of the second polymerization
step, monomer can be removed from the polymerization system
to prepare a particulate polymer. The resultant polymer is
subjected to the measurement of the intrinsic viscosity
([η]$_{WHOLE}$) and the content of α-olefin.

The propylene resin compositions of the present
invention can be served as raw materials for shaped articles
having various shapes formed by a variety of shaping methods
such as injection, extrusion, inflation, calendaring or the
like. In molding, the propylene resin composition may be
blended, if necessary, with inorganic fillers such as talc,
calcium carbonate, silica and mica, and organic and
inorganic pigments which have been used in conventional
polyolefins. Further, known additives can be added, if
necessary, such as antioxidants, neutralizers, weathering

agents, antistatic agents, lubricants, foaming agents, flame retardants and transparent nucleating agents.

EXAMPLE

The invention is further illustrated by the following examples and comparative examples, but not limited thereto.

1) Method for the measurement of various physical properties

The methods for the measurement of physical properties used in the Examples and Comparative Examples are mentioned below.

a) tan δ and E': They were measured at a frequency of 110 Hz and a temperature rise rate of 2°C/min., using an automatic measuring device for dynamic viscoelasticity (trade name: REO VIBRON DDV-III-EP, manufactured by ORIENTEC Co. Ltd.). For the measurement, a plate-like 27 X 10 X 1 mm test piece was used, which was prepared by melt pressing the propylene resin composition at 200°C.

b) Intrinsic viscosity (dl/g): It was measured in tetralin (tetrahydronaphthalene) used as a solvent, at a temperature of 135°C, using an automatic viscometer (trade name: AVS2-type, manufactured by MITSUI TOATSU, Co., Ltd.).

c) Particle size (μm) and degree of uniformity of catalyst component for polyolefin manufacture: An average particle size was determined from a particle size distribution measured using "Master Sizer" (trade name, manufactured by MALVERN Co. Ltd.). The degree of uniformity was a value

obtained by dividing a particle size equivalent to a screen opening where the integrated amount of a sample fallen from a screen opening reached 10% of all samples when the screen opening is gradually shifted from a small screen opening to a large screen opening, by a particle size equivalent to a screen opening where the above amount reached 60% of all samples.

d) Content of α-Olefin unit (weight %): It was measured by Infrared absorption spectroscopy.

e) Melting point : It was measured at a temperature rise rate of 20°C/min., using a differential scanning calorimeter (trade name: DSC Dupont 1090, manufactured by Du Pont Company).

2) Preparation of catalyst component for polyolefin manufacture

a) Catalyst component for polyolefin manufacture (A-1)

95.3 g of anhydrous $MgCl_2$ and 352 ml of dry EtOH were charged in a SUS autoclave purged with nitrogen, a mixture was heated to 105°C with stirring and melted. After stirring for one hour, this solution was fed into a two-way spray nozzle with pressurized nitrogen (1.1 MPa) heated at 105°C. The flow rate of nitrogen gas was 38 liter/min. Liquid nitrogen for cooling was introduced into a spray tower to keep the temperature in the tower at -15°C. A product was collected in cooled hexane introduced at the bottom of the tower to obtain 256 g. According to the analysis of the product, the composition of this product was

found to be $MgCl_2 \cdot 6EtOH$ identical with the starting solution.

This product was sieved to obtain 205 g of a spherical product having a particle size of 45-212 μm. The resultant spherical product was dried at room temperature for 181 hrs., using nitrogen at the flow rate of 3 liters/min, to prepare a dry product with the composition of $MgCl_2 \cdot 1.7$ EtOH. This product was used as a carrier.

In a glass flask purged with nitrogen, 20 g of the dry carrier, 160 ml of titanium tetrachloride and 240 ml of purified 1,2-dichloroethane were mixed and heated to 100°C with stirring, 6.8 ml of diisobutyl phthalate were added, and a mixture was further heated at 100°C for 2 hrs. A liquid phase part was removed by decantation, washed with purified hexane and then dried to prepare a catalyst component for polyolefin manufacture (A-1). The resultant catalyst component for polyolefin manufacture (A-1) had the average particle size of 115 μm and the degree of uniformity of 1.80, with the analysis of the following composition: Mg: 19.5% by weight, Ti: 1.6% by weight, Cl: 59.0% by weight.

b) Catalyst component for polyolefin manufacture (A-2)

60 ml of titanium tetrachloride and 40 ml of toluene were charged in a glass flask purged with nitrogen to prepare a mixed solution. A suspension prepared from 20 g of magnesium diethoxide having an average particle size of 42 μm, 100 ml of toluene and 7.2 ml of di-n-butyl phthalate

was added to the mixed solution kept at 10°C. Subsequently, the temperature of the resulting mixture was elevated from 10°C to 90°C over a period of 80 minutes and the mixture was reacted while stirring for 2 hrs. After completion of the reaction, the resulting solid product was washed four times with 200 ml of toluene at 90°C, and 60 ml of additional titanium tetrachloride and 140 ml of toluene were added. The temperature of the mixture was elevated to 112°C and the mixture was reacted while stirring for another 2 hrs. After completion of the reaction, the resultant solid product was washed 10 times with 200 ml of n-heptane at 40°C to prepare a catalyst component for polyolefin manufacture (A-2). The resultant catalyst component for polyolefin manufacture (A-2) had the average particle size of 42 μm and the degree of uniformity of 2.00, with the analysis of the following composition: Mg: 18.9% by weight, Ti: 2.2% by weight, Cl: 61.6% by weight.

c) Catalyst component for polyolefin manufacture (A-3)

A mixture of 300 g of magnesium ethoxide, 550 ml of 2-ethylhexyl alcohol and 600 ml of toluene was stirred at 93°C for 3 hrs under a carbon dioxide atmosphere of 0.20 MPa, and further 800 ml of toluene and 800 ml of n-decane were added to prepare a magnesium carbonate solution.

100 ml of the magnesium carbonate solution as prepared above were added to a mixed solution stirred at 30°C for 5 minutes, comprising 800 ml of toluene, 60 ml of chlorobenzene, 18 ml of tetraethoxysilane, 17 ml of titanium

tetrachloride and 200 ml of "Isopar G" (trade name, manufactured by EXXSON Co. Ltd.)(isoparaffin hydrocarbon with 10 average carbon numbers, b.p. 56-176°C).

After stirring for additional 5 minutes, 44 ml of tetrahydrofuran were added, and a mixture was stirred at 66°C for one hour. After stirring was ceased and the supernatant solution was removed, the resulting solid was washed with 100 ml of toluene, 200 ml of chlorobenzene and 200 ml of titanium tetrachloride were added to the resultant soiid, and a mixture was stirred at 135°C for one hour. After stirring was ceased and the supernatant solution was removed, 500 ml of chlorobenzene, 200 ml of titanium tetrachloride and 4.2 ml of di-n-butyl phthalate were added, and a mixture was mixed at 135°C for 1.5 hrs. After the supernatant solution was removed, the solid was washed with successive, 1200 ml of toluene, 1600 ml of "Isopar G" and 800 ml of hexane to prepare a catalyst component (A-3) for polyolefin manufacture in Comparative Example. The resultant catalyst component for polyolefin manufacture (A-3) had the average particle size of 24μm and the degree of uniformity of 1.64, with the analysis of the following composition: Mg: 17.0% by weight, Ti: 2.3% by weight, Cl: 55.0% by weight.

(Example 1)

3) Pre-activation of catalyst component for polyolefin manufacture

A stainless steel reaction vessel having an internal volume of 20 liters equipped with slant vanes was purged with nitrogen gas and then charged at room temperature with 18 liter of a saturated hydrocarbon solvent having a dynamic viscosity of 70 centistokes at 40°C (trade name: CRYSTOL-352, manufactured by ESSO Petroleum Co. Ltd.), 1.8 liter of hexane, 100.6 mmol of triethyl aluminum, 15.1 mmol of di-isopropyl-di-methoxysilane and 120.4 g of the catalyst component (A-1) for polyolefin manufacture as prepared above, and the mixture was warmed to 30°C. Subsequently, the catalyst was pre-activated by feeding 240.8 g of propylene while stirring over a period of 3 hrs. The result of the analysis indicated that 1.9 g of propylene was reacted per 1 g of the catalyst component for polyolefin manufacture.

4) First polymerization step

In the flow sheet shown in Fig. 1, 0.4 g/hr of the pre-activated catalyst, triethyl aluminum as an organoaluminum compound and di-isopropyl-di-methoxysilane as an organosilicon compound were continuously fed to a horizontal type polymerization reactor equipped with stirring vanes (L/D=6, internal volume 100 lit.), under such a condition that an Al/Si molar ratio was 6. A mixed gas of propylene and ethylene in the indicated molar ratio as shown in Table 1 was continuously fed, while maintaining the conditions including the reaction temperature of 60°C, the reaction pressure of 2.1 MPa and the stirring speed of 35

rpm. Further, hydrogen gas was continuously fed through piping 2 so that the hydrogen concentration in the vapor phase within the polymerization reactor was kept at the hydrogen/propylene molar ratio shown in Table 1, to produce

5   the propylene-α-olefin copolymer (A).

Reaction heat was removed by heat of vaporization of a raw material, propylene fed through piping 3. Unreacted gas discharged from the polymerization reactor was cooled and condensed outside the reaction system via piping

10   4 and returned to polymerization reactor 1.

The resultant propylene-α-olefin random copolymer (A) was continuously taken out from the polymerization reactor 1 via piping 5 so that the polymer occupied 50% by volume of the reactor, and then it was fed to a

15   polymerization reactor 10 in the second polymerization step. At this time, a part of the propylene-α-olefin random copolymer (A) was intermittently taken out from piping 5 and it was used as a sample for measuring the ethylene content and intrinsic viscosity.

20   5) Second polymerization step

The propylene-α-olefin random copolymer (A) from the first polymerization step and a mixed gas of ethylene and propylene were continuously fed to a horizontal type polymerization reactor 10 equipped with stirring vanes

25   (L/D=6, internal volume 100 lit.) to carry out a copolymerization of ethylene and propylene. The reaction conditions include the stirring speed of 25 rpm, the

temperature of 55°C and the pressure of 1.9 MPa. The gas composition in the vapor phase was controlled to give the ethylene/propylene molar ratio and the hydrogen/ethylene molar ratio shown in Table 1. Through piping 11, carbon monoxide was supplied as a polymerization inhibitor to control the amount of the propylene-α-olefin random copolymer (B) polymerized, and through piping 7 hydrogen gas was supplied to control the molecular weight of the propylene-α-olefin random copolymer (B).

Reaction heat was removed by heat of vaporization of a raw material, liquid propylene supplied from piping 6. Unreacted gas discharged from the polymerization reactor was transferred to the outside of the reaction system via piping 8, cooled, condensed and then returned to the second polymerization step. The propylene resin composition produced in the second polymerization step was continuously taken out from polymerization reactor 10 via piping 9 so that the level of the polymer retained is 50% by volume of the reaction volume. The production rate of the propylene resin composition was 8 to 15 kg/hr.

For the propylene-α-olefin random copolymer (A) produced in the first step and the polypropylene composition produced in the second step, various physical properties were measured. The intrinsic viscosity $[\eta]_B$ of the propylene-α-olefin random copolymer (B) was calculated on the basis of the above-mentioned equation, using the intrinsic viscosity $[\eta]_A$ of the propylene-α-olefin random

copolymer (A) and the intrinsic viscosity $[\eta]_{WHOLE}$ of the propylene resin composition. The result of various physical properties measured was shown in Table 1. The chart of storage elastic modulus (E') and loss tangent (tan δ) measured is shown in Fig. 2.

(Examples 2-5, Comparative Examples 1-4)

The above-mentioned catalyst component for polyolefin manufacture (A-2) was used as a catalyst component. The compositions of Examples 2-5 and Comparative Examples 1-4 were produced by varying the ethylene/propylene molar ratio and the hydrogen/propylene molar ratio in the first polymerization step as well as the ethylene/propylene molar ratio and the hydrogen/ethylene molar ratio in the second polymerization step as shown in Tables 1 and 2.

The results of various physical properties measured for the resultant compositions are shown in Tables 1 and 2. For Comparative Example 2, the chart of storage elastic modulus (E') and loss tangent (tan δ) measured is shown in Fig. 3.

(Comparative Example 5)

The above-mentioned catalyst component for polyolefin manufacture (A-3) was used as a catalyst component. The composition of Comparative Example 5 was produced by varying the ethylene/propylene molar ratio and the hydrogen/propylene molar ratio in the first polymerization step as well as the ethylene/propylene molar

ratio and the hydrogen/ethylene molar ratio in the second

polymerization step as shown in Table 2.

The result of various physical properties measured

for the resultant composition is shown in Table 2.

5   6) Production of injection molded articles

0.004 kg of a phenol type heat stabilizer and

0.004 kg of calcium stearate were added to 4 kg of each

composition produced in each Example and Comparative

Example, and they were mixed at room temperature for 2

10   minutes using a high speed stirring mixer (trade name:

Henschel mixer). The mixture was granulated into pellets by

an extruding granulator with a screw diameter of 40 mm.

Then, a JIS type test piece was prepared from the pellets

using an injection molding machine at the molten resin

15   temperature of 250°C and the mold temperature of 50°C. The

resulting test piece was conditioned in a chamber kept at

50% humidity and at a temperature of 23°C for 72 hours, and

various physical properties thereof were measured according

to the following methods. The results were shown in Tables

20   1 and 2.

a) Flexural modulus (MPa): It was measured in accordance

with JIS K 7203.

b) Haze: It was measured in accordance with ASTM D 1003

using a plate-like 25 × 50 × 1 mm test piece conditioned

25   under the above condition.

c) Izod impact value: It was measured in accordance with JIS

K 6758 at each temperature of 0°C and -20°C.

d) Whitening by impact: A load was fallen, under the following conditions, on a plate-like 50 × 50 × 2 mm test piece conditioned under the above conditions, using a du Pont impact machine (manufactured by Toyo Seiki Co., Ltd.), and a diameter of whitening area generated on the test piece by impact was measured.

Tip radius in impact core	0.635 cm
Inner diameter of anvil	3.81 cm
Load	500 g
Falling height of load	1 m

Table 1

First polymerization step		Example				
		1	2	3	4	5
Polymerization pressure	MPa	2	→	→	→	→
Polymerization temperature	°C	60	→	→	→	→
α-Olefin component		ethylene	→	→	→	→
Hydrogen/propylene (molar ratio)		0.004	0.006	0.005	0.004	0.005
Ethylene/propylene (molar ratio)		0.007	0.007	0.006	0.002	0.003
Copolymer (A)						
Produced amount W_A	wt%	67	73	60	56	75
Propylene unit content	wt%	99.1	99.1	99.2	99.7	99.6

Table 1 (Cont'd)

		Example				
		1	2	3	4	5
Second polymerization step						
Polymerization pressure	MPa	1.9	↑	↑	↑	↑
Polymerization temperature	°C	55	↑	↑	↑	↑
α-Olefin component		Ethylene	↑	↑	↑	↑
Ethylene/propylene (molar ratio)		0.14	0.13	0.11	0.11	0.13
Hydrogen/ethylene (molar ratio)		0.52	0.45	0.60	0.62	0.52
Copolymer (B)						
Produced amount W_B	wt%	33	27	40	44	25
Propylene unit content	wt%	75	77	78	78	77
Intrinsic viscosity $[\eta]_B$		1.76	1.93	1.66	1.59	1.61
Propylene resin composition						
Number of tan δ peak in the range of -80-80°C.		1	1	1	1	1
Temperature at which E' is 1×10^8 or less	°C	154.6	153.7	154.7	163.5	163.1
Intrinsic viscosity $[\eta]_{WHOLE}$		1.76	1.93	1.66	1.59	1.61
Physical properties of shaped article						
Flexural modulus	MPa	350	570	450	380	590
Haze	%	31	39	32	38	39
Izod impact value (0°C)	kJ/m²	NB*1	14.1	NB*1	NB*1	12.4
(-20°C)		16	10	18	14	8
Diameter of whitening by impact	mm	0	3.2	0	0	3.5
Melting point	°C	156	156	157	161	161

*1: Not destructed

Table 2

		Comparative Example				
		1	2	3	4	5
First polymerization step						
Polymerization pressure	MPa	2	↑	↑	↑	↑
Polymerization temperature	°C	60	↑	↑	↑	↑
α-Olefin component		—	—	ethylene	↑	↑
Hydrogen/propylene (molar ratio)		0.0035	0.02	0.02	0.006	0.012
Ethylene/propylene (molar ratio)		0	0	0.002	0.006	0.029
Copolymer (A)						
Produced amount W_A	wt%	50	67	67	82	80
Propylene content	wt%	100	100	99.8	99.3	97.0

Table 2 (Cont'd)

		Comparative Example				
		1	2	3	4	5
Second polymerization step						
Polymerization pressure	MPa	1.9	↑	↑	↑	↑
Polymerization temperature	°C	55	↑	↑	↑	↑
α-Olefin component		Ethylene	↑	↑	↑	↑
Ethylene/propylene (molar ratio)		0.23	0.26	0.26	0.14	0.14
Hydrogen/ethylene (molar ratio)		0.30	0.41	0.40	0.90	0.40
Copolymer (B)						
Produced amount W_B	wt%	50	33	33	18	20
Propylene content	wt%	66	64	64	75	75
Intrinsic viscosity $[\eta]_B$		2.59	2.02	2.16	1.54	2.17
Propylene resin composition						
Number of tanδ peak in the range of -80-80°C		2	2	2	1	1
Temperature at which E' is 1×10^8 or less	°C	164.7	170.7	168.7	154.9	143.7
Intrinsic viscosity $[\eta]_{WHOLE}$		2.84	2.02	2.08	2.41	2.17
Physical properties of shaped article						
Flexural modulus	MPa	300	570	560	740	510
Haze	%	47	53	52	53	45
Izod impact value (0°C)	kJ/m²	NB*1	NB*1	NB*1	6.5	10.6
(-20°C)		NB	19	16	3.7	5.4
Diameter of whitening by impact	mm	0	14.7	12.7	12.5	12.9
Melting point	°C	165	165	162	158	145

*1: Not destructed

INDUSTRIAL UTILIZATION

The shaped articles produced from the propylene resin composition satisfying the requirements for physical properties in the present invention have excellent transparency, stress-whitening resistance, impact strength at low temperatures, and further heat resistance, and well-balanced properties thereof. The propylene resin composition of the present invention is used suitably in various applications for which such properties are required.

CLAIM

1.   A propylene resin composition comprising 80 to 40% by weight of (A) a propylene-α-olefin random copolymer with the content of a propylene unit of 99.1 to 99.9% by weight, and 20 to 60% by weight of (B) a propylene-α-olefin random copolymer with the content of a propylene unit of 70 to 90% by weight, wherein the composition has only one peak of loss tangent (tan δ) in the temperature range of $-80\,^{\circ}\text{C}$ to $80\,^{\circ}\text{C}$, and the temperature providing not more than 1×10^8 dyn/cm^2 of storage elastic modulus (E') is not less than $150\,^{\circ}\text{C}$, in the temperature dependence of dynamic viscoelasticity of the composition.

2.   The propylene resin composition of claim 1 wherein the temperature providing not more than 1×10^8 dyn/cm^2 of storage elastic modulus (E') is not less than $155\,^{\circ}\text{C}$.

3.   The propylene resin composition of claim 1 wherein the intrinsic viscosity of the propylene-α-olefin random copolymer (B) is in the range of 0.5-2.0 dl/g.

ABSTRACT

A propylene resin composition is constructed so as to contain (A) a propylene-α-olefin random copolymer with the content of a propylene unit of 99.1 to 99.9% by weight, and (B) a propylene-α-olefin random copolymer with the content of a propylene unit of 70 to 90% by weight, in the specified proportion, and to have the specified loss tangent (tan δ) and storage elastic modulus (E′), in the temperature dependence of dynamic viscoelasticity. Thereby, the propylene resin composition is provided, suitable as a raw material for shaped article having a well-balanced combination of transparency, stress-whitening resistance, impact resistance at low temperatures, and further heat resistance.
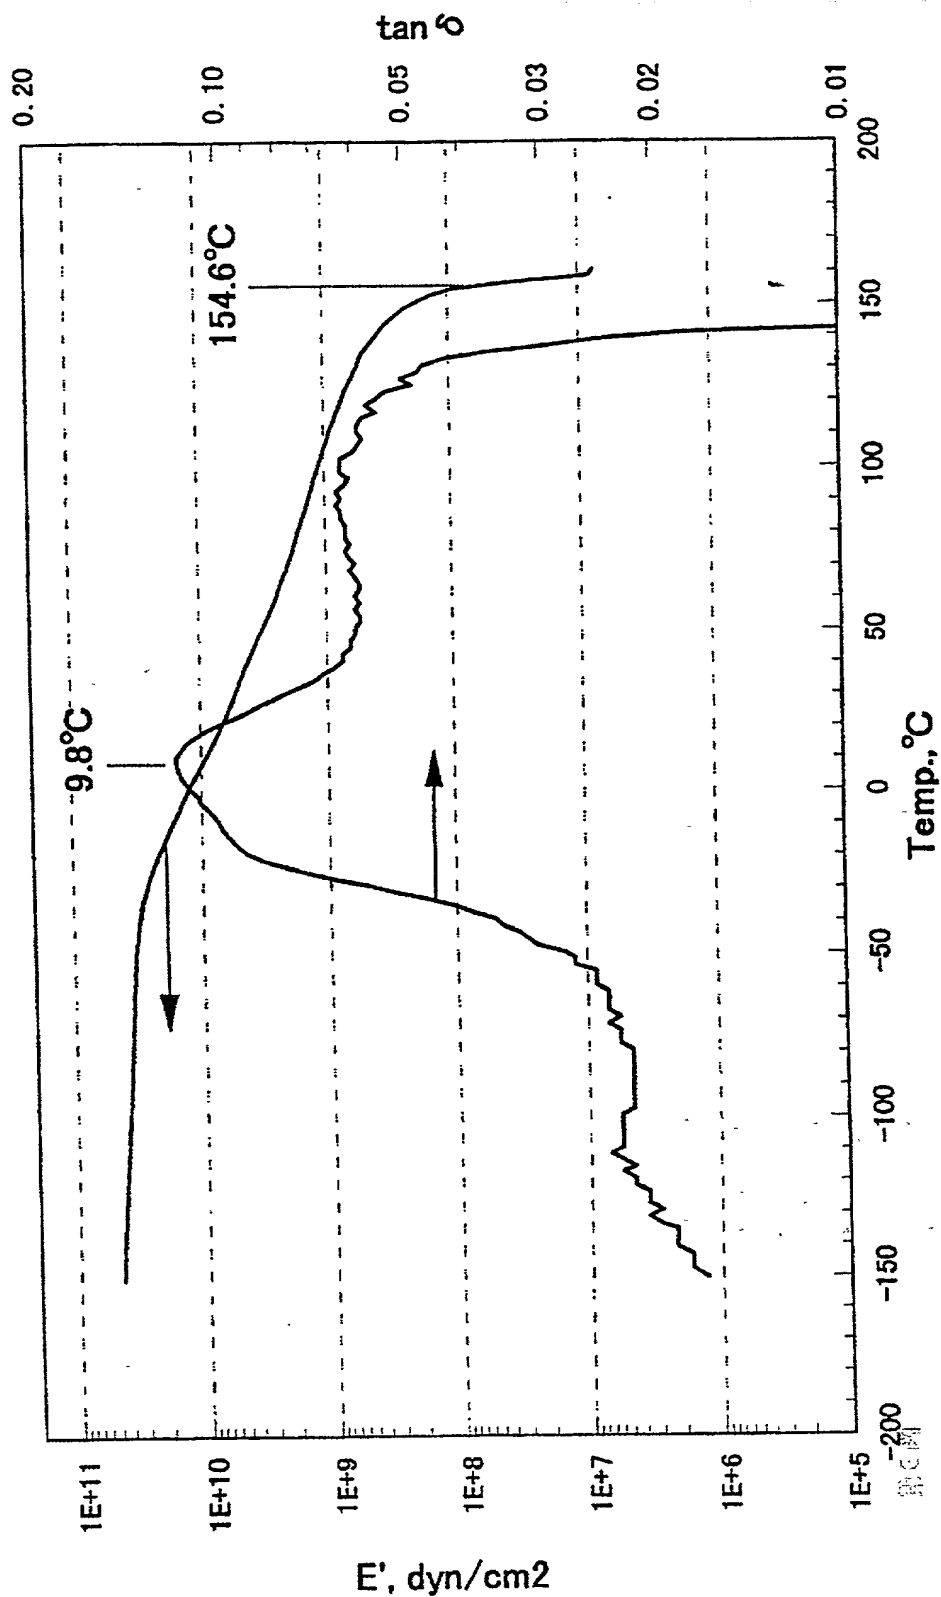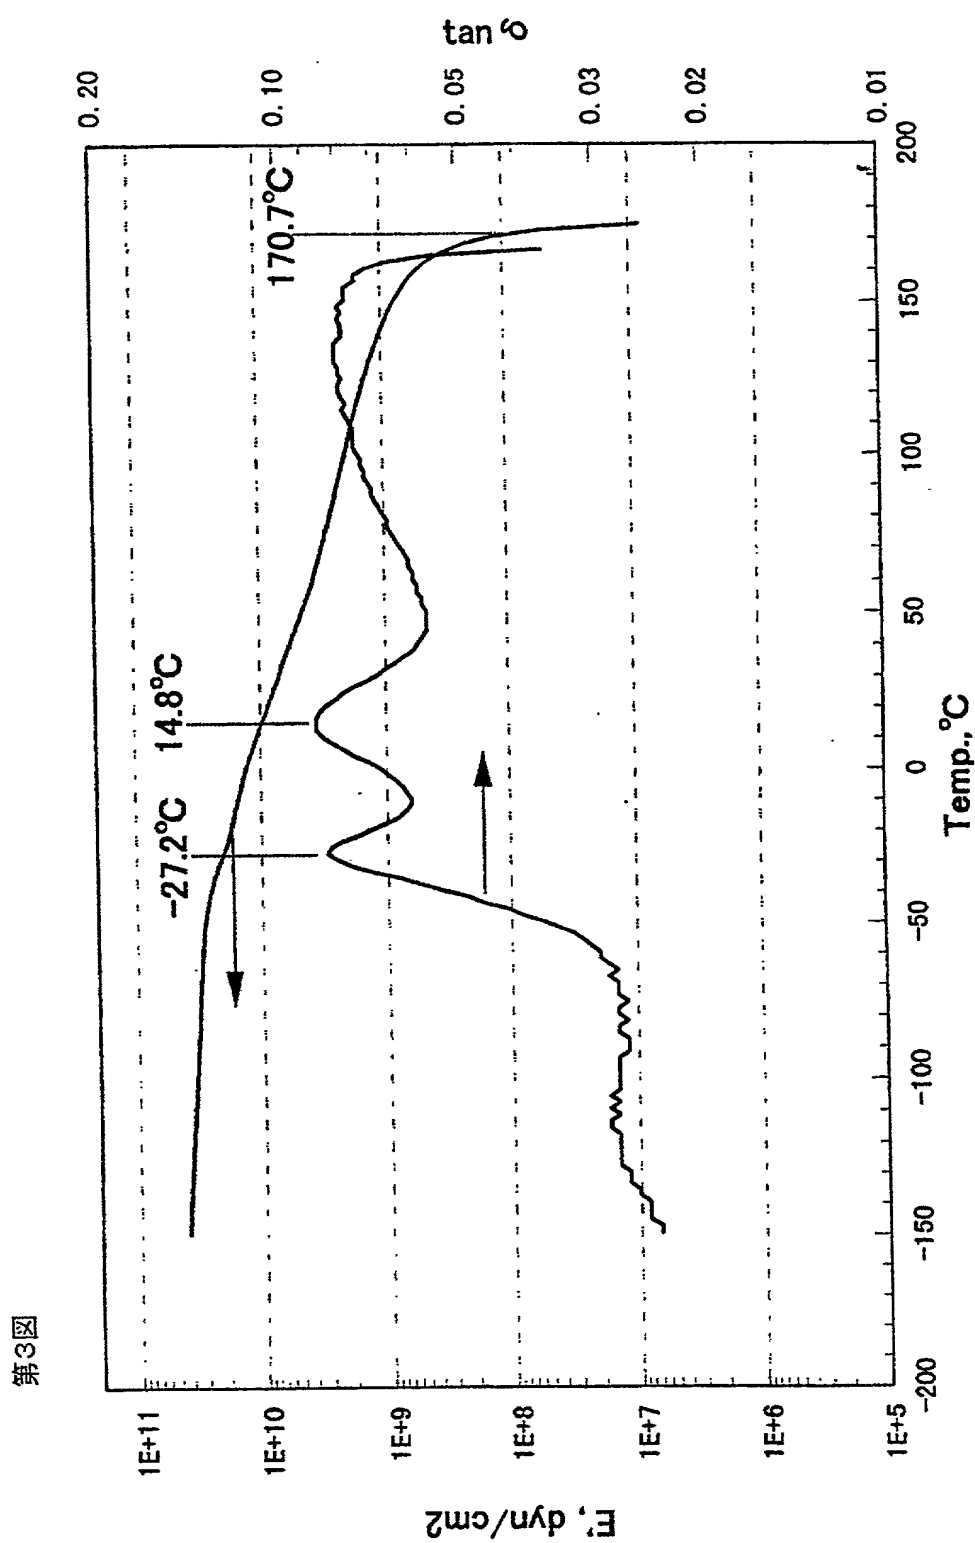
第1図

第2図

第2図
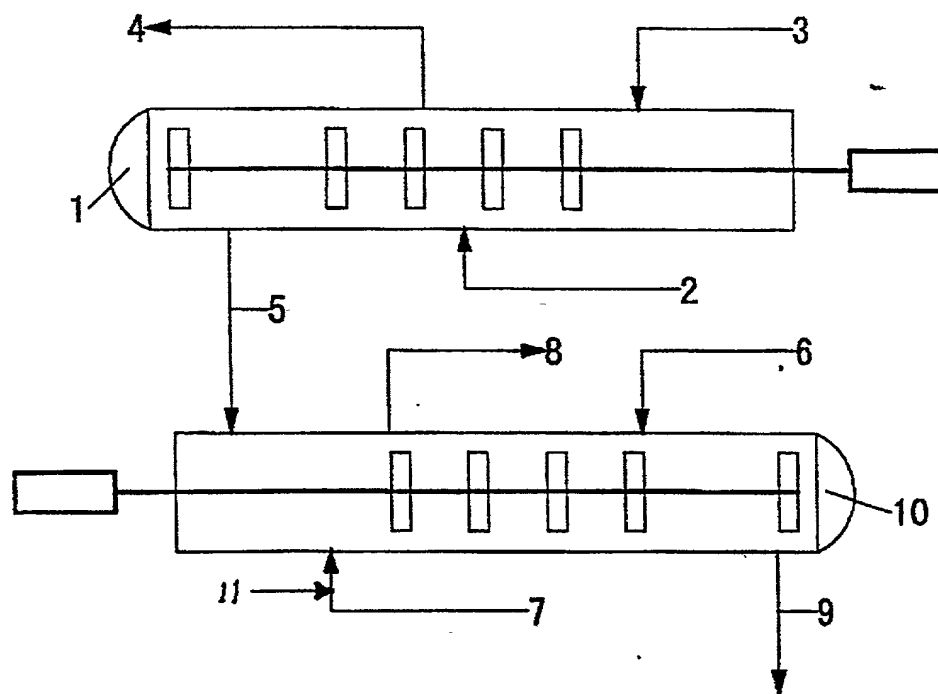
第3図

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
PROPYLENE RESIN COMPOSITION

プロピレン系樹脂組成物

上記発明の明細書は、

- ☐ 本書に添付されています。
- ☐ ___月___日に提出され、米国出願番号または特許協定条約国際出願番号を_____とし、（該当する場合）_____に訂正されました。

the specification of which

- ☐ is attached hereto.
- ☒ was filed on ___September 5, 2000___ as United States Application Number or PCT International Application Number
  PCT/JP00/ 06008 ___ and was amended on
  _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration
（日本語宣言書）

私は、米国法典第35編119条（a）-（d）項又は365条（b）項に基づき下記の、米国以外の国の少なくとも一ヵ国を指定している特許協力条約365（a）項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)
外国での先行出願

11-252936	JAPAN
(Number) （番号）	(Country) （国名）

(Number) （番号）	(Country) （国名）

Priority Claimed
優先権主張

07/09/1999	☒ Yes はい	☐ No いいえ
(Day/Month/Year Filed) （出願年月日）		

	☐ Yes はい	☐ No いいえ
(Day/Month/Year Filed) （出願年月日）		

私は、第35編米国法典119条（e）項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) （出願番号）	(Filing Date) （出願日）

(Application No.) （出願番号）	(Filing Date) （出願日）

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条（c）に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.) （出願番号）	(Filing Date) （出願日）

(Status: Patented, Pending, Abandoned) （現況：特許許可済、係属中、放棄済）

(Application No.) （出願番号）	(Filing Date) （出願日）

(Status: Patented, Pending, Abandoned) （現況：特許許可済、係属中、放棄済）

私は、私自信の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration
（日本語宣言書）

委任状：私は下記の発明者として、本出願に関する一切の手続き を米特許商標局に対して遂行する弁理士または代理人として、 下記の者を指名いたします。
（弁護士、または代理人の指名及び登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*

John M.Belz, Reg.30359

Jeffrey A. Wyand, Reg. 29458

Jeremy M. Jay, Reg. 33587

書類送付先

Xavier Pillai, Reg. 39799

John D. Foster, Reg. 22943

Send Correspondence to: Customer N= 23548

LEYDIG, VOIT & MAYER

Suite 300

700 Thirteenth Street, N.W.

Washington, D.C. 20005

直接電話連絡先： （名前及び電話番号）

Direct Telephone Calls to: (name and telephone number)
202-737-6770

単独発明者または第一の共同発明者の氏名 中島　隆則　　　　　　　1 - ∞	Full name of sole or first joint inventor Takanori NAKASHIMA
発明者の署名　　　　　　　　日付	Inventor's signature　　Takanori Nakashima　　Date January 18, 2002
住所 日本国千葉県	Residence　　Chiba, Japan　JPX
国籍 日本国	Citizenship　　Japanese
郵便の宛先 日本国千葉県千葉市美浜区打瀬１丁目２番地３ セントラルパーク・ウエスト　シータワー１６０３号	Post Office Address Central Park West Sea Tower 1603, 2-3 Utase 1-chome, Mihama-ku, Chiba 261-0013 Japan
第二の共同発明者の氏名 秋田谷　真一　　　　　　　2 - ∞	Full name of second joint inventor, if any Shinichi AKITAYA
第二の共同発明者の署名　　　　　日付	Second joint Inventor's signature　　Shinichi Akitaya　　Date January 18. 2002
住所 日本国千葉県	Residence　　Chiba, Japan　JPX
国籍 日本国	Citizenship　　Japanese
郵便の宛先 日本国千葉県市原市菊間２８９７番地７９	Post Office Address 2897-79, Kikuma, Ichihara-shi, Chiba 290-0007 Japan

（第三以降の共同発明者についても同様に記載し、署名すること）

(Supply similar information and signature for third and subsequent joint inventors.)

OVER

Japanese Language Declaration
（日本語宣言書）

第三の共同発明者の氏名　石本　祐哉　3-00	Full name of third joint inventor, if any Yuya ISHIMOTO
第三の共同発明者の署名　　　　　日付	Third joint Inventor's signature　　　　Date _Yuya Ishimoto_　January 18, 2002
住所　日本国千葉県	Residence　Chiba, Japan　JPX
国籍　日本国	Citizenship　Japanese
郵便の宛先 日本国千葉県市原市椎津３６６番地１	Post Office Address 366-1, Shiizu, Ichihara-shi, Chiba 299-0118 Japan

第四の共同発明者の氏名　望月　泰宏　4-00	Full name of fourth joint inventor, if any Yasuhiro MOCHIZUKI
第四の共同発明者の署名　　　　　日付	Fourth joint Inventor's signature　　　Date _Y. Mochizuki_　January 18, 2002
住所　日本国千葉県	Residence　Chiba, Japan　JPX
国籍　日本国	Citizenship　Japanese
郵便の宛先 日本国千葉県千葉市美浜区高洲４丁目１２番地 ４号	Post Office Address 12-4, Takasu 4-chome, Mihama-ku, Chiba-shi, Chiba 261-0004 Japan

第五の共同発明者の氏名　森本　芳孝　5-00	Full name of fifth joint inventor, if any Yoshitaka MORIMOTO
第五の共同発明者の署名　　　　　日付	Fifth joint Inventor's signature　　　　Date _Yoshitaka Morimoto_　January 18, 2002
住所　日本国神奈川県	Residence　Kanagawa, Japan　JPX
国籍　日本国	Citizenship　Japanese
郵便の宛先 日本国神奈川県横浜市金沢区乙舳町１０番３号	Post Office Address 10-3, Ottomo-cho, Kanazawa-ku, Yokohama-shi, Kanagawa 236-0024 Japan

第六の共同発明者の氏名　隅　祥高　6-00	Full name of sixth joint inventor, if any Yoshitaka SUMI
第六の共同発明者の署名　　　　　日付	Sixth joint Inventor's signature　　　　Date _Yoshitaka Sumi_　January 18, 2002
住所　日本国大分県	Residence　Oita, Japan　JPX
国籍　日本国	Citizenship　Japanese
郵便の宛先 日本国大分県大分市明野西２－２６－１、４０５号	Post Office Address 405, 2-26-1, Akenonishi, Oita-shi, Oita 870-0164 Japan

（第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。）

(Supply similar information and signature for third and sub-sequent joint inventors.)